


For swing gates with a gate wing width of up to max. 3,5 m and a gate wing weight of max. 350 kg<sup>1)</sup>

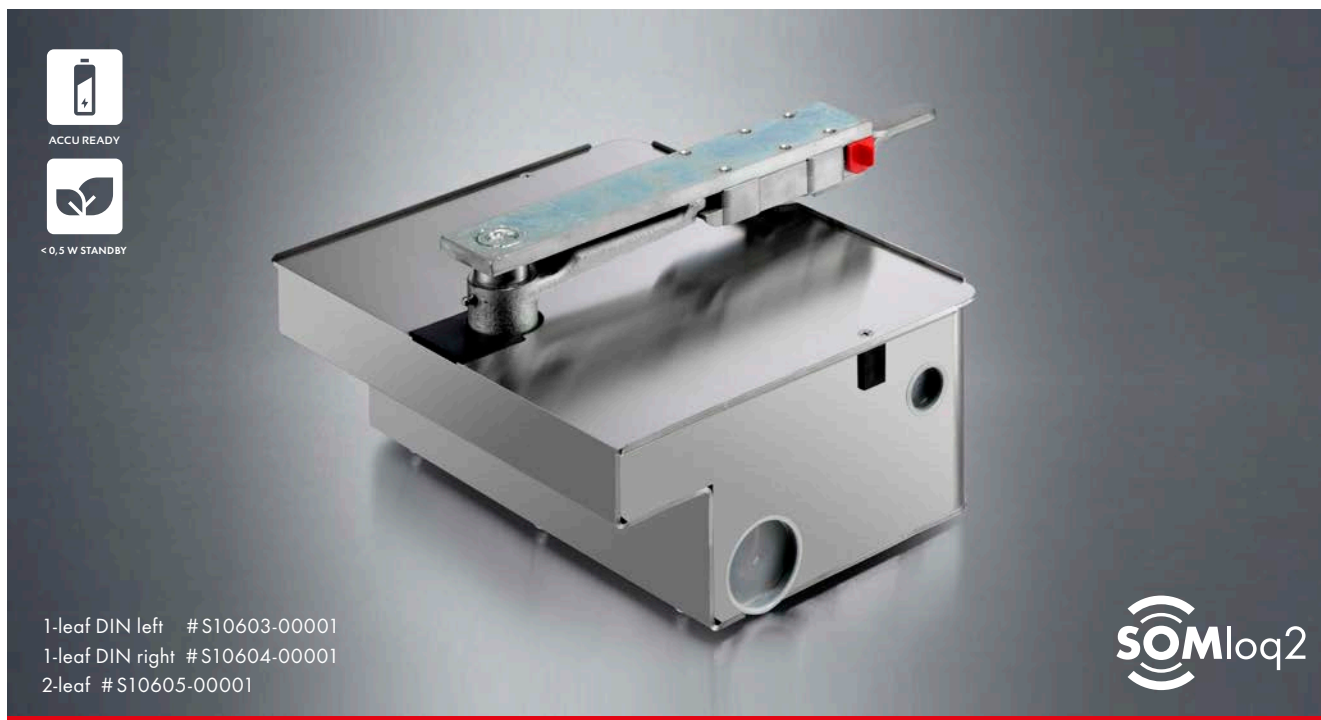

## Advantages:

- Single- and dual-wing operation
- Ideal for swing gates in which the operator should not be visible
- Certified restriction of closing forces acc. to EN 12445 by electronic motor monitoring
- Close sequence regulation (active/ inactive wing) electronically monitored
- Automatic closing function (semi-/fully-automatic, shortening after drive-through)
- Programming of end positions and operating forces with few reference drives
- High-quality DC gear motor with hall sensor
- Bi-directional SOMloq2 radio system
- Power saving (standby < 0,5 Watt)
- Mechanical emergency release, lockable
- Can be unlocked in any position
- Weather-proof device housing
- Safety connections for example for safety contract strip, photo eye, electrical gate lock, warning light 24 V
- Connection option for battery pack provides buffer in the event of a power failure
- Accessories for extension, e.g. **Memo** (memory to 450 hand-held transmitter commands)

## TECHNICAL DATA

Temperature range	-25 °C to +65 °C
Nominal voltage	AC 220 - 240 V
Nominal frequency	50/60 Hz
Max. torque	320 Nm
Max. opening angle	105°
Permissible duty cycle S 3	40%
IP code	operator IP 67 control IP 65



With intelligent control technology SOMlink (for dealers), there are additional options for easily adjusting features and parameters with a web app using your smartphone or tablet. (# 7040V000)

<sup>1)</sup> Starting at 3 m leaf length and 300 kg gate weight, the use of active safety edges is required.

Last updated: 04/2016. Literal errors, errors and technical changes excepted.